





- 1/3" Black & White 420 lines 0.1 lux
- Small size allows discreet installation
- Weatherproof housing with integrated hood
- 33° or 70° field of view
- Industry standard 1/4-20 mount
- Adjustable swivel mount included
- 12V plug-in power supply included
- 3-year warranty

Model	BB33W	BB70W
Other Models	BBI33W (Ivory)	BBI70W (Ivory)
Field of View (lens)	33° (8mm)	70° (3.6mm)
Image Sensor	B/W 1/3" CCD	
TV System	EIA	
Picture Elements (pixels)	500 (H) × 580 (V)	
Horizontal Resolution	420 TV Lines	
Min. Illumination	0.1 lux at F2.0	
Signal to Noise Ratio	More than 50dB	
Synchronizing System	Internal	
Video Output	1Vp-p 75ohm	
Gamma Correction	r = 0.45	
Electronic Iris (auto)	1/60-1/100,000	
Power Requirement	12VDC ±20%	
Operating Current	100mA w/ regulated power in	
Operating Condition	+14 ~ 122°F (-10°C ~ +50°C)	
Measurement – ø (dia.) × L	ø0.75 × 2.6 inches (ø19mm × 66mm)	
Weight (Camera Only)	1.6 oz. (45g)	
Included Accessories	• UL Approved 12V 300mA plug-in power supply • Adjustable swivel mount	
Optional Accessory	EC60PV - 60' extension cable with power/video connectors	

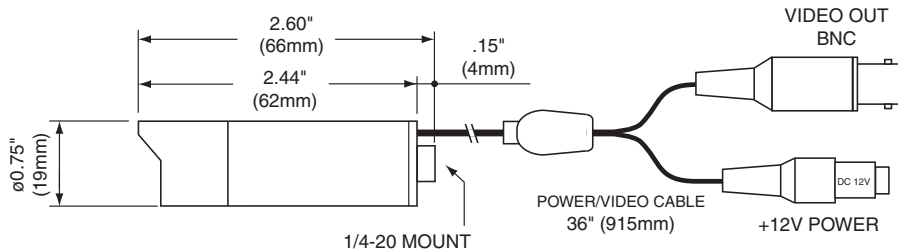

Specifications subject to change without notice